

PORTABLE WELDING MACHINE
A-INVERTER 270
A-ENERGY SAVING 270
A-INVERTER 220

LIGHT CONSTRUCTION EQUIPMENT

PLATE COMPACTOR
CONCRETE VIBRATOR SET

INDUSTRIAL GAS CUTTING OUTFIT
CURRIS TYPE
LIMIT TYPE

SACRIFYING MACHINE
SM1H
CONCRETE ASPHALT CUTTER DIESEL

MIG WELDING MACHINE
-MIG- 250

WALK BEHIND ROAD ROLLER
CONCRETE CUTTER
CONCRETE ASPHALT CUTTER

GAS CUTTING MACHINE
GAS WELDING & CUTTING EQUIPMENT

ENGINE DRIVEN SUBMERSIBLE PUMP
CONCRETE VIBRATOR SET (85550F+C)

1. AUTO DARKENING WELDING MASK
2. FILL-UP WELDING MASK
3. WELDING MASK

1. TIG WELDING TORCH COLLET BODY
2. MIG WELDING TORCH CONTACT TIP
3. TIG WELDING TORCH COLLET
4. TIG WELDING TORCH LONG BACK
5. TIG WELDING TORCH SHORT BACK
6. TIG WELDING TORCH CERAMIC NOZZLE

TUNGSTEN ELECTRODE
CARBON ELECTRODE RODS

PLATE COMPACTOR (T-90-85550)
ENGINE (EY 28B)
ENGINE (L68F)

1. GRINDING WHEEL FOR METAL STAINLESS STEEL
2. REINFORCE CUTTING OFF WHEEL, STEEL STAINLESS STEEL

IMPACT DRILL

AIR COOLED DIESEL ENGINE
LOW SPEED CAPACITY
8HP
10HP
12HP
14HP
16HP

SPRAYER

CEMENT SPRAY
STEEL BAR BENDER CUTTER
STEEL BAR CUTTER

HIGH SPEED CAPACITY
7HP
8HP
10HP
12HP
14HP
16HP

SILENT TYPE GENERATOR

OFF SAW
GASOLINE JACK HAMMER

LEADING IN WELDING TECHNOLOGY

Mild Steel Electrodes
Hard Facing Electrodes
Low Hydrogen Electrodes
Stainless Steel Electrodes
Cast Iron Electrodes
Cutting Electrode

Fluxed Cored Wires
SS MIG Wires
SS TIG Wires
CO₂ MIG Wires
Welding Machines
Welding Accessories

CAST IRON
HARD SURFACING
STAINLESS STEELS
ALUMINUM AND BRONZE
CUTTING ELECTRODES

CHANFEING RODES
CHANFERING RODES
SILVER RODES
ENCONEL
MIG WIRES / TIG WIRES

CONSTRUCTION MATERIALS

PVC/PPR PIPE
RECTANGULAR/SQUARE TUBING
CORRUGATED SHEETS
STEEL MATTING
STEEL/ARMORED/CHECKERED PLATE
C-PURLINS
FLAT BAR
DEFORMED BAR

HI BEAM
TIRE WIRE
ANGLE BAR
PE HOSE

SAFETY PRODUCTS

HARDHAT
FACE SHIELD
GLOVES
FULL BODY HARNESS
LINEMAN'S SAFETY BELT
LANYARD
WELDING BLANKET

WELDING HELMET
SAFETY GOGGLES
SAFETY SHOES
REFLECTORIZED VEST
TRAFFIC CONE
FLOOR SIGN
WELDING APRON

BARRICADE TAPE
SPEED HUMP
CONVEX MIRROR
RESPIRATOR
COVER ALL
DOCKING BUMPER
EAR MUFF

NEW PRODUCT WATERPROOF SERIES

KB 270 WATER PROOF
☑ SINGLE PHASE
☑ THREE PHASE
☑ 220-440V

KB 301 WATER PROOF
☑ SINGLE PHASE
☑ THREE PHASE
☑ 220-440V

KB 301S WATER PROOF
☑ SINGLE PHASE
☑ THREE PHASE
☑ 220-440V

KB 401S WATER PROOF
☑ SINGLE PHASE
☑ THREE PHASE
☑ 220-440V

PLASMA CUTTING

KB-CUT 101
KB-CUT 102

MIG MACHINES / MIG WELDING

KB MIG 271
KB MIG 272

TIG MACHINES

KB-TIG 200
KB-TIG 250AC/DC

Quality Tools and Equipments



POWER ARC WATERPROOF INVERTER WELDING MACHINE 300 AMPS

RATED OUTPUT CURRENT (A) : 90-300
RATED VOLTAGE (V) : 220/440
RATED FREQUENCY (Hz) : 60
RATED INPUT CAP. (KVA) : 60





PREMIUM QUALITY TOOLS AND EQUIPMENTS

ARC WELDING MACHINES (COPPER)



PA-500 CU	
ARC WELDER	
Rated Output Current (A)	: 500
Rated Input Voltage (V)	: 220/440
Rated Frequency (Hz)	: 60
Rated Input Capacity (Kva)	: 38
No Load Electric Voltage (V)	: 76
Rated Duty Cycle (%)	: 80
Current Range (A)	: 100-500



PA-315 CU	
ARC WELDER	
Rated Output Current (A)	: 315
Rated Input Voltage (V)	: 220/440
Rated Frequency (Hz)	: 60
Rated Input Capacity (Kva)	: 23.5
No Load Electric Voltage (V)	: 76
Rated Duty Cycle (%)	: 80
Current Range (A)	: 60-315

ARC WELDING MACHINES (ALUMINUM)




PA-500 AL	
ARC WELDER	
Rated Output Current (A)	: 500
Rated Input Voltage (V)	: 220/440
Rated Frequency (Hz)	: 60
Rated Input Capacity (Kva)	: 38
No Load Electric Voltage (V)	: 76
Rated Duty Cycle (%)	: 80
Current Range (A)	: 100-500



PA-315 AL	
ARC WELDER	
Rated Output Current (A)	: 315
Rated Input Voltage (V)	: 220/440
Rated Frequency (Hz)	: 60
Rated Input Capacity (Kva)	: 23.5
No Load Electric Voltage (V)	: 76
Rated Duty Cycle (%)	: 80
Current Range (A)	: 60-315


JB KAWASAKI

POWER SPRAYER

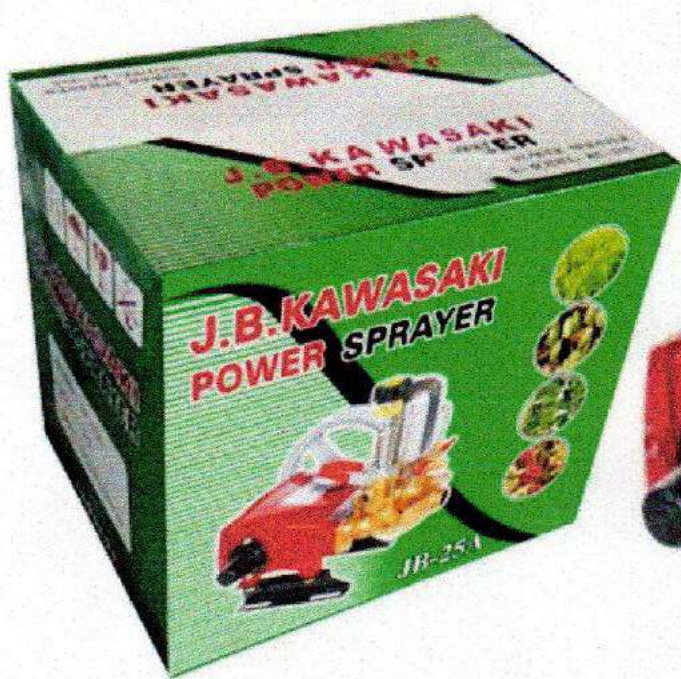

JB-25A

1. Air Chamber with SUS#304 which corrosion resisted.
2. Plunger with SUS#304 and Chrome Plated surface
3. Ceramic Plunger is available option.
4. Graphite Iron made Pump that heavy duty and durable.
5. Ceramic of by pass Valve, that durable.
6. Triple Plungers that make pressure steady.
7. Driving lightly, Power can be used Electric Motor 1~2HP or Engine 3.5PS
8. Suction capacity is 9.5~19L/min
9. Working pressure is 15~40kgf/cm² with 500~1000RPM
10. Good application for Inset pest control for Garden, Agriculture industry, Pipe testing , high pressure washing, ect.



GQ50

Beautiful shape,
quality
in the Core



The box is made of high strength ductile iron castings. Internal Gear, gear shaft, connecting rod are made by carbon steel or alloy materials

The connecting rod, blade mounting parts are made of high strength material and the tin bronze largely reduce the crankshaft wear

Large motor power, easy cutting

MODEL GQ50

SPECIFICATION

Tensile Strength	Kg/mm ² 45	Kg/mm ² 65
Steel Bar diameter	6-50mm	6-45mm
Motor Power	4KW-2P	
Cutting Speed	41 T/min	
Weight	630Kg.	
Dimensions (L*W*H)	1270*650*950mm	
Shneider Electric Parts		
Certification	2006/42/EC	- 2006/95/EC

THERMOPLASTIC ROAD LINE MACHINE

1. Paint Tank:

Double stainless insulated heated bucket, 100kg, plug-in manual stirring devices, removable device.

2. Glass Bead Storage Boxes:

10kg/box

3. Glass Pearl Beads Broadcasters:

Synchronous clutch sow, equipped with speed-shift device.

4. Bucket:

High-precision thin metal, scraper-type structure, standard configuration 150mm.

5. Floor Tool:

Carbide with eccentric sleeve device, able to adjust line thickness (1-2.5mm)

6. Type:

Aluminum alloy wheel unit, heat-resistant rubber traits, tail-wheel equipped with locator, car along a straight line direction.

7. Heating:

Liquefied petroleum gas

8. Marking Width:

50/80/100/120/150/180/200/230/250/300/400/450mm

9. Dimension and weight:

1200x800x1160mm

10. Net weight: 135kg


Model: QK-4






TOWER LIGHT

PA-TL10000 MODEL

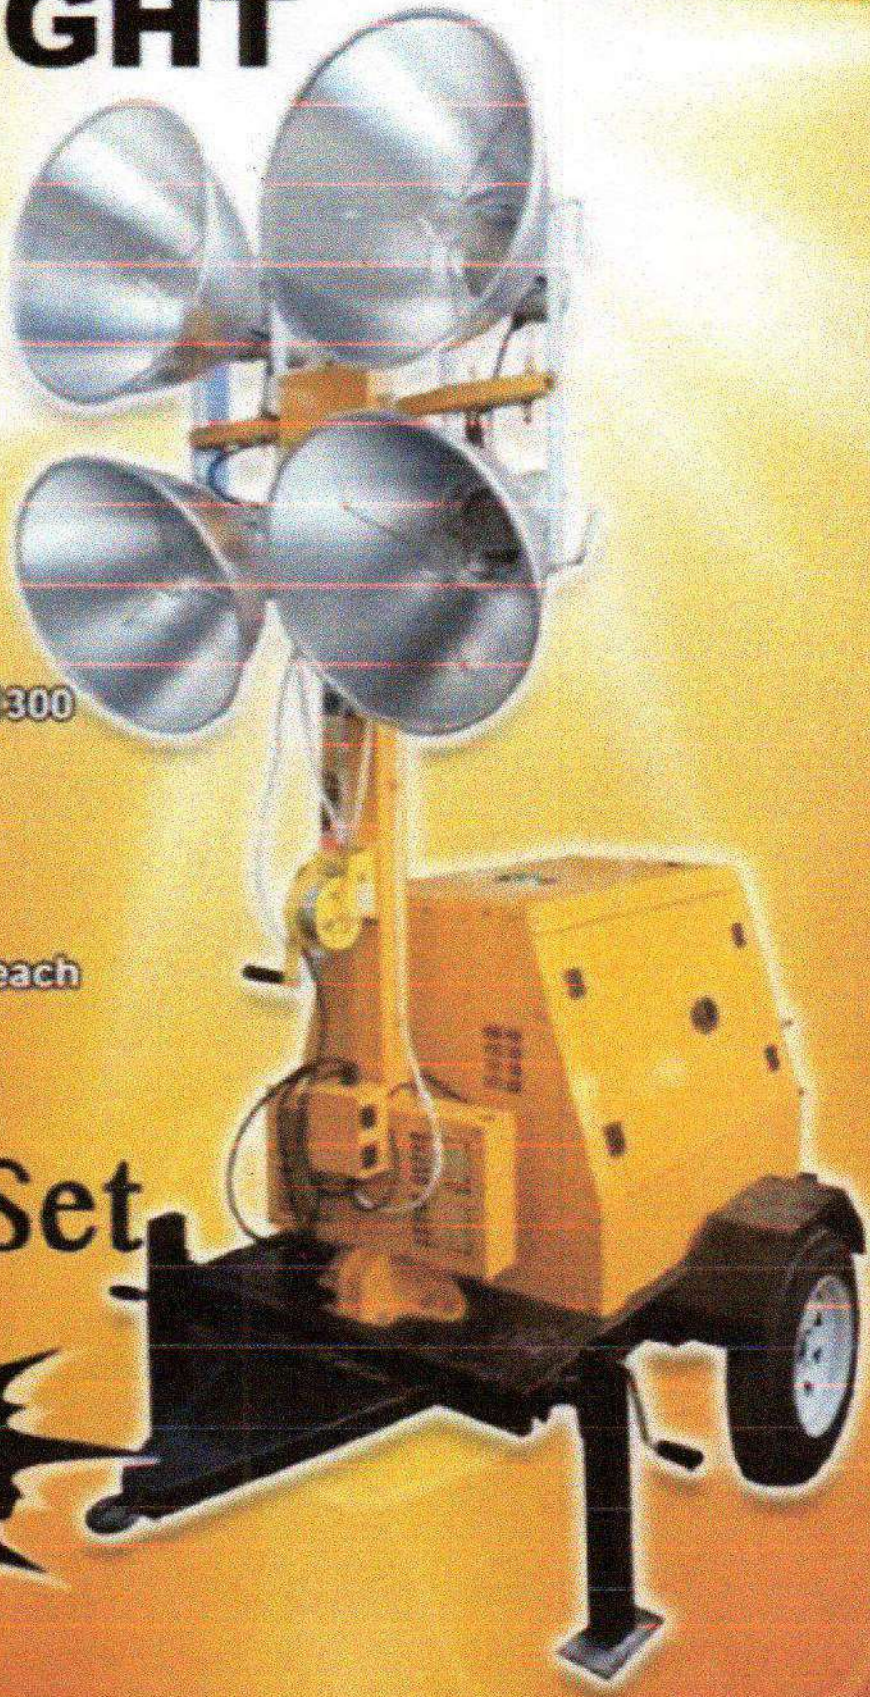

GEN OUTPUT	5KVA
VOLTAGE	220
FREQUENCY	60
POWER FACTOR	100
PRODUCE DATE	2018_09
DIMENSION	1360*1210*1300
ENG. MODEL	AP186FA
GEN.NO	18090303
PHASE	1
R.P.M	1800
WEIGHT	300KG
Metal Hollide	1000 watts each

Silent Diesel Generator Set

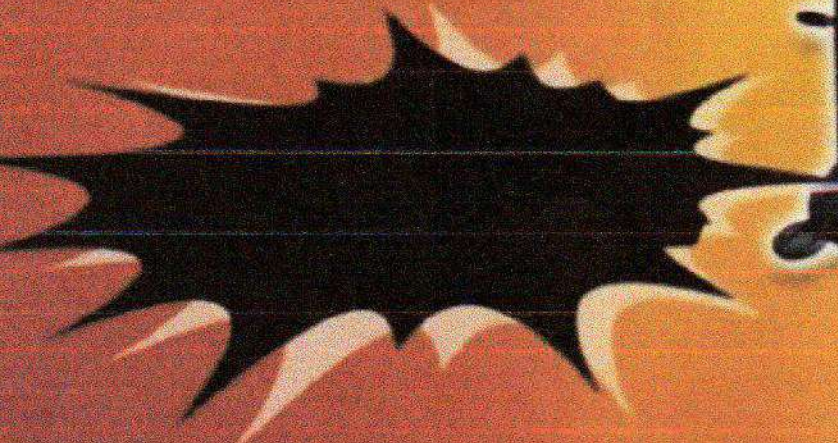



WORKSITE
Tools & Equipment

Worksite Gasoline Generator, EGT113




- Engine type: 20cc, 4 Stroke, Air-cooled.
- Engine max. power output: 7.0HP / 3600RPM.
- Start system: Recoil & hand and electric start.
- Fuel tank capacity: 15L (4.0GAL).
- Rated output power: 3000W.
- Peak output power: 3500W.
- 9 hours @ 50% Capacity running time.
- Low oil shut-off for better protection.
- Ideal for emergencies, individual power tools, recreation, household, lawn and garden.

13,500.00

10+1

GASOLINE GENERATOR



EGT-102

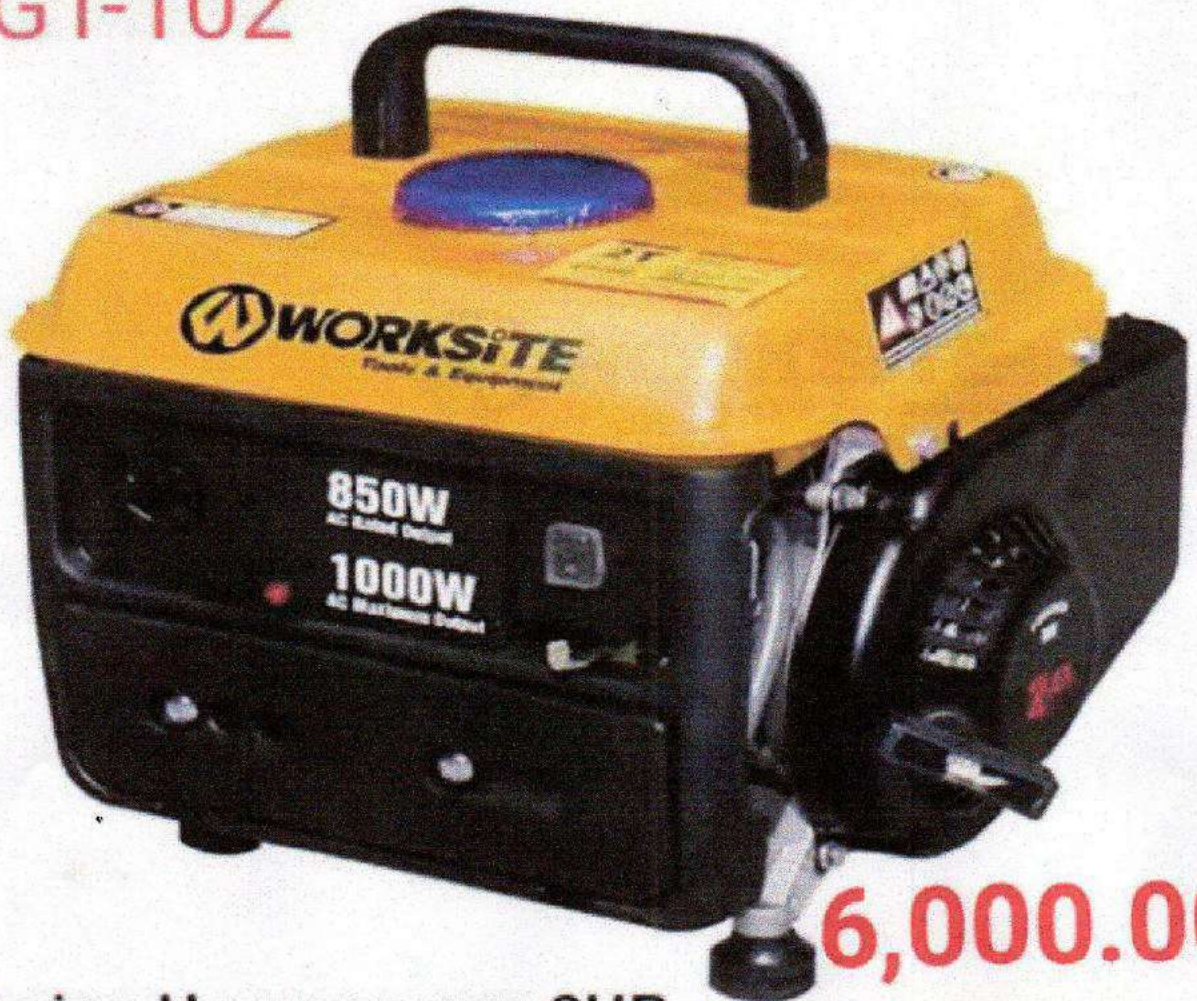

- Engine Horsepower: 2HP
- Displacements: 63cc
- Engine Type: 2 stroke
- Gas/Oil Mix: 50:01
- Fuel Tank Capacity: 4L
- Rated Current: 4A
- Rated Voltage: 120/230V
- Rated Power: 1000W
- Frequency: 50/60Hz
- Speed: 3600RPM

 **WORKSITE**
Tools & Equipment

YAMAMOTO WELDING MACHINE

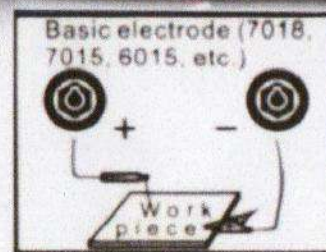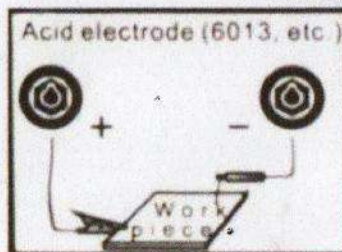

Model.....	YAM 300	
Suitable rod.....	1.6-5.0mm	
Generator.....	≤9.6KW	
Rod diameter	2.5mm	3.2mm
Welding current	50-80A	100-130A
Rod diameter	4.0mm	5.0mm
Welding current	130-150A	150-180A

NEED MORE PARKING SPACE?




**4 POST
PARKING LIFT
and OTHER GARAGE
EQUIPMENTS AVAILABLE**






QUALITY TOOLS AND EQUIPMENTS

AIR-COOLED DIESEL GENERATOR with REMOTE CONTROL

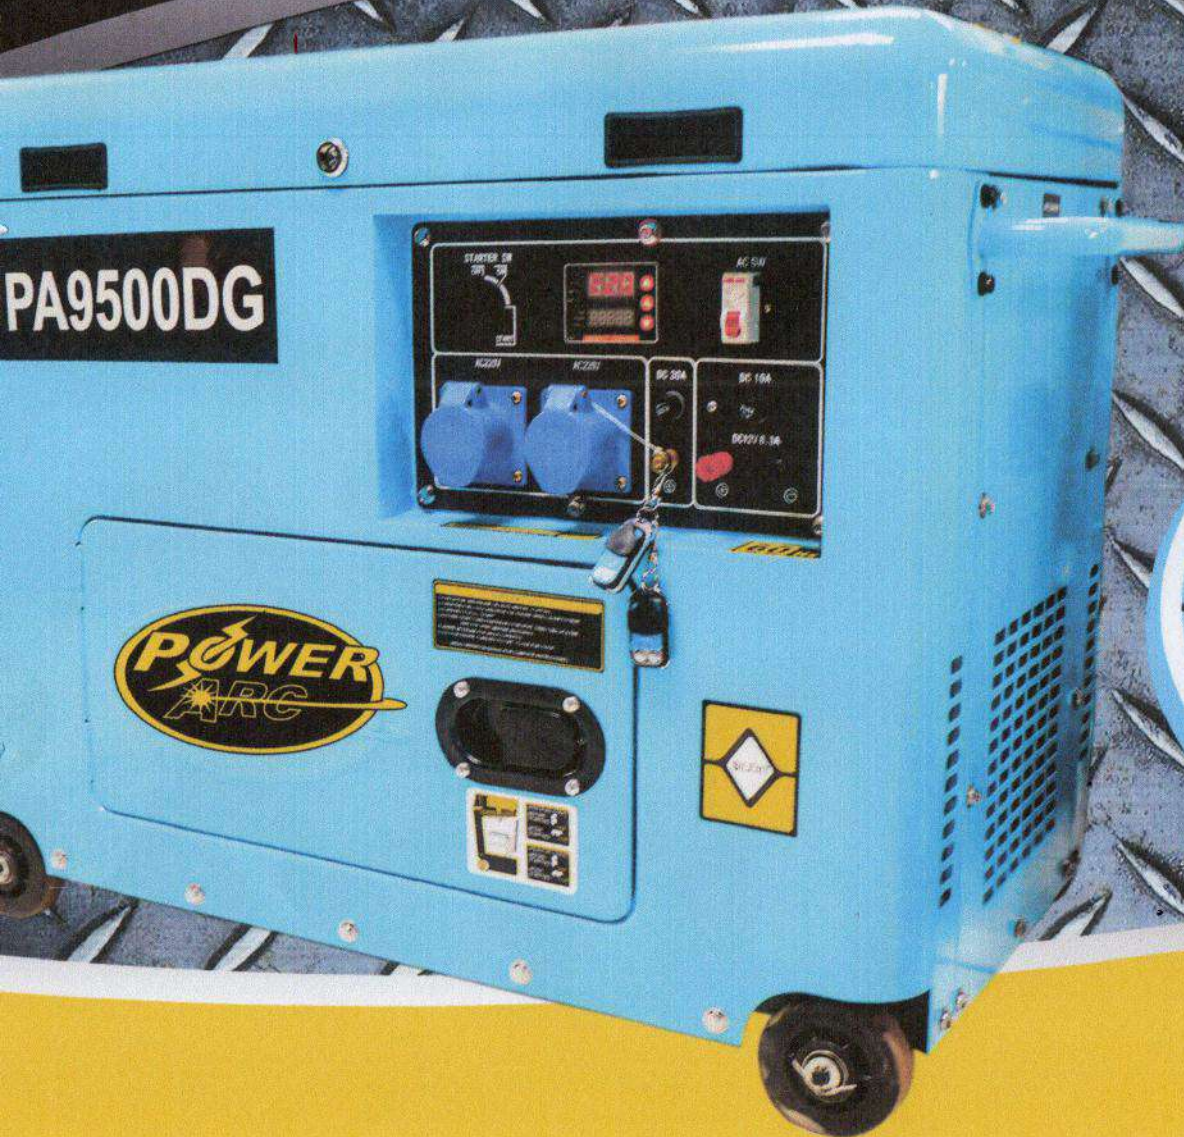

SPECIFICATION

Model	PA9500DG
Max. AC Output	5.5KVA
Rated AC Output	5.0KVA
Rated AC VOLTAGE	220V
Rated Current	22.7A
Frequency	60HZ

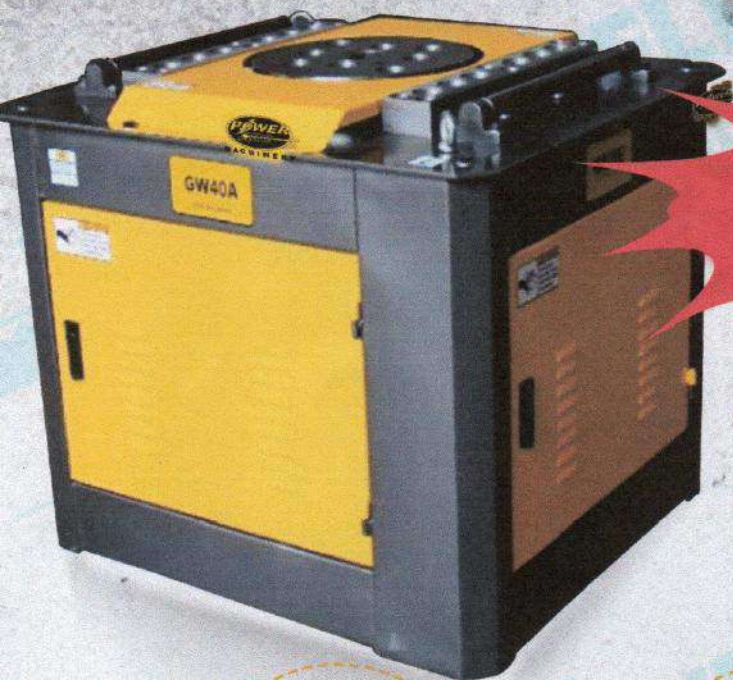

RB50

inner quality
more
beautiful than
appearance



Solid disc and saddle, Ultra wide solid hand piece.



The box body is turbine worm type, forging steel and disc, working life was 2-3 times as normal model, enclosed electric cabinet, safe and reliable.




4KW international standard Copper motor, can work in two speed, satisfied different needs of bending the steel bar.

MODEL RB50

SPECIFICATION

Bending Capacity	6-52 mm(ob≤450N/mm ²) 6-46 mm (ob≤650N/mm ²)
Operation	Automatic
Type of Motor	YEJ 100L2-4(Brake Motor)
Motor Power	4.0KW-4P
Speed of Working Disk	8 R/min
Weight	595Kg.
Dimensions (L*W*H)	910*700*910mm
Certification	2006/42/EC - 2006/95/EC


BATTERY CHARGER

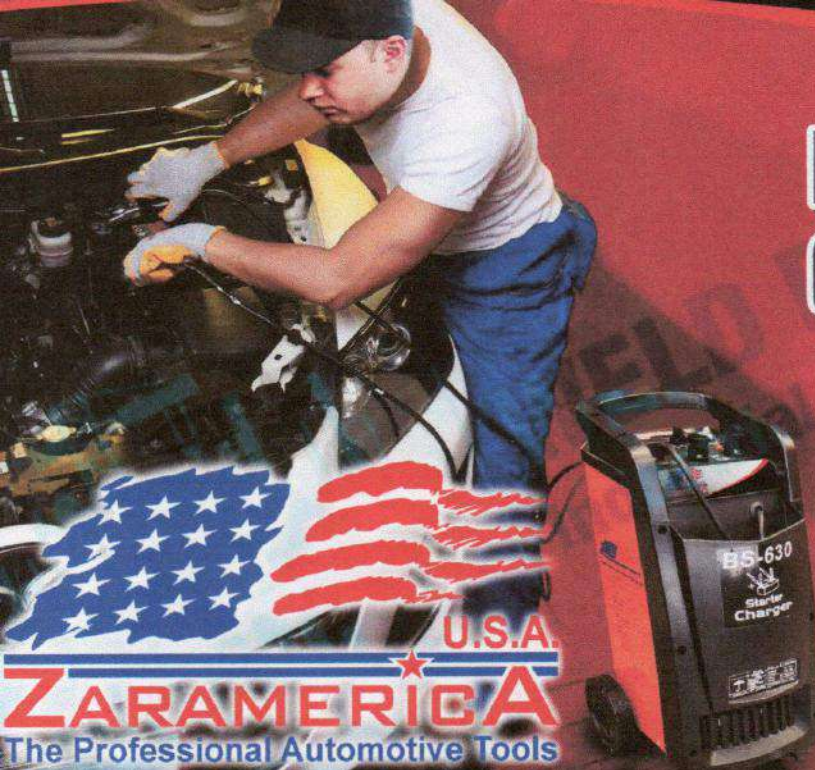

ZARAMERICA
The Professional Automotive Tools

FEATURES:

- * Single-phase portable lead-acid battery charger.
- * Exquisite design and stable changing current.
- * Equipped with ammeter and over-load protection.
- * Slow charge and boost charge mode selectable.
- * Suitable for battery charging for cars, vans, light trucks, etc.
- * Supplied with charging cable, charging clamps and fuses.

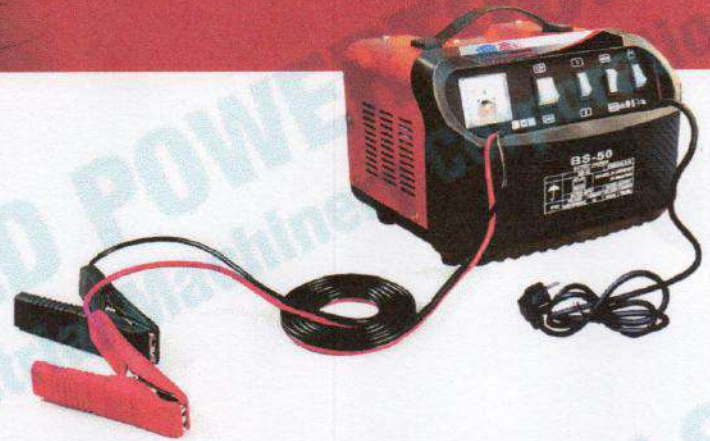

FEATURES:

- * Single-phase, wheeled, vertical type lead-acid battery chargers.
- * Exquisite design and stable charging current.
- * Equipped with ammeter and over-load protection.
- * Slow charge, boost charge and quick start mode selectable.
- * Suitable for battery charging for cars, vans, light trucks, etc. Quick start for small cars and trucks.
- * Supplied with charging cable, charging clamps and fuses.

MODEL	BS-50	BS-30
Input Power Voltage (V)	AC220-230	AC220-230
Input Power Frequency (Hz)	50/60	50/60
Rated Input Capacity(W)	980	
Charging Voltage(V)	12/24	12/24
Rated Charging Current(A)	20	
Max Charging Current(A)	50	30
Start Current(A)	130	
Rated Charging Capacity(Ah)	30-400	
Insulation Grade	H	H
Protection Grade	IP21S	IP21S
Current Regulator	3	
Dimensions (mm)	280*260*205	280*260*205
Weight(kg)	9.2	

Price

4,275⁰⁰

2,850⁰⁰



MODEL	BS-630	BS-530	BS-430	BS-330	BS-230
Input Power Voltage (V)	AC220-230	AC220-230	AC220-230	AC220-230	AC220-230
Input Power Frequency (Hz)	50/60	50/60	50/60	50/60	50/60
Rated Input Capacity(KW)	2.6	2	1.6	1.4	
Charging Voltage(V)	12/24	12/24	12/24	12/24	12/24
Rated Charging Current (A)	60	50	40	30	20
Max Charging Current(A)	130	110	85		
Start Current(A)	500	400	350		
Rated Charging Capacity (Ah)	50-1000	40-800	30-600	20-200	10-100
Insulation Grade	H	H	H	H	H
Protection Grade	IP21S	IP21S	IP21S	IP21S	IP21S
Current Regulator	7	7	5		
Dimensions (mm)	370*320*630	370*320*630	370*320*630	370*320*630	370*320*630
Weight(kg)	22.3	19.5	17.8	17	

HONDA BRUSH CUTTER GX-35 ENGINE

Made in Thailand

SPECIFICATIONS

- GEAR CASE : ALUMINUM, Ø28: 8*9T
- TUBE : ALUMINUM
- DRIVE SHAFT : SOLID STEEL, Ø8 x 1500mm
- SUSPENSION POINT : PLASTIC HANGER
- HANDLE JOIN ASSEMBLY : ALUMINUM, Ø28
- HANDLE : BICYCLE HANDLE; ALUMINUM
- THROTTLE LEVER : TRIGGER TYPE WITH STOP SWITCH
- HARNESS : RE-042 QUALITY HARNESS
- SAFETY GUARD : TS-2801R ASIA TYPE SAFETY GUARD
- CUTTING BLADE : 2T BLADE
- TOOL BAG : INCLUDED



**POWERED BY
HONDA GX35 ENGINE**


Made in Thailand

- Displacement : 42.7 cc
- Max output (kw) : 1.7
- Fuel tank capacity : 0.9
- Carbure Type : Diaphragm
- Start System : Recoil Starter
- Clutch System : Automatic centrifugal



JB KAWASAKI
JAPAN BUILDERS

BRUSH CUTTER

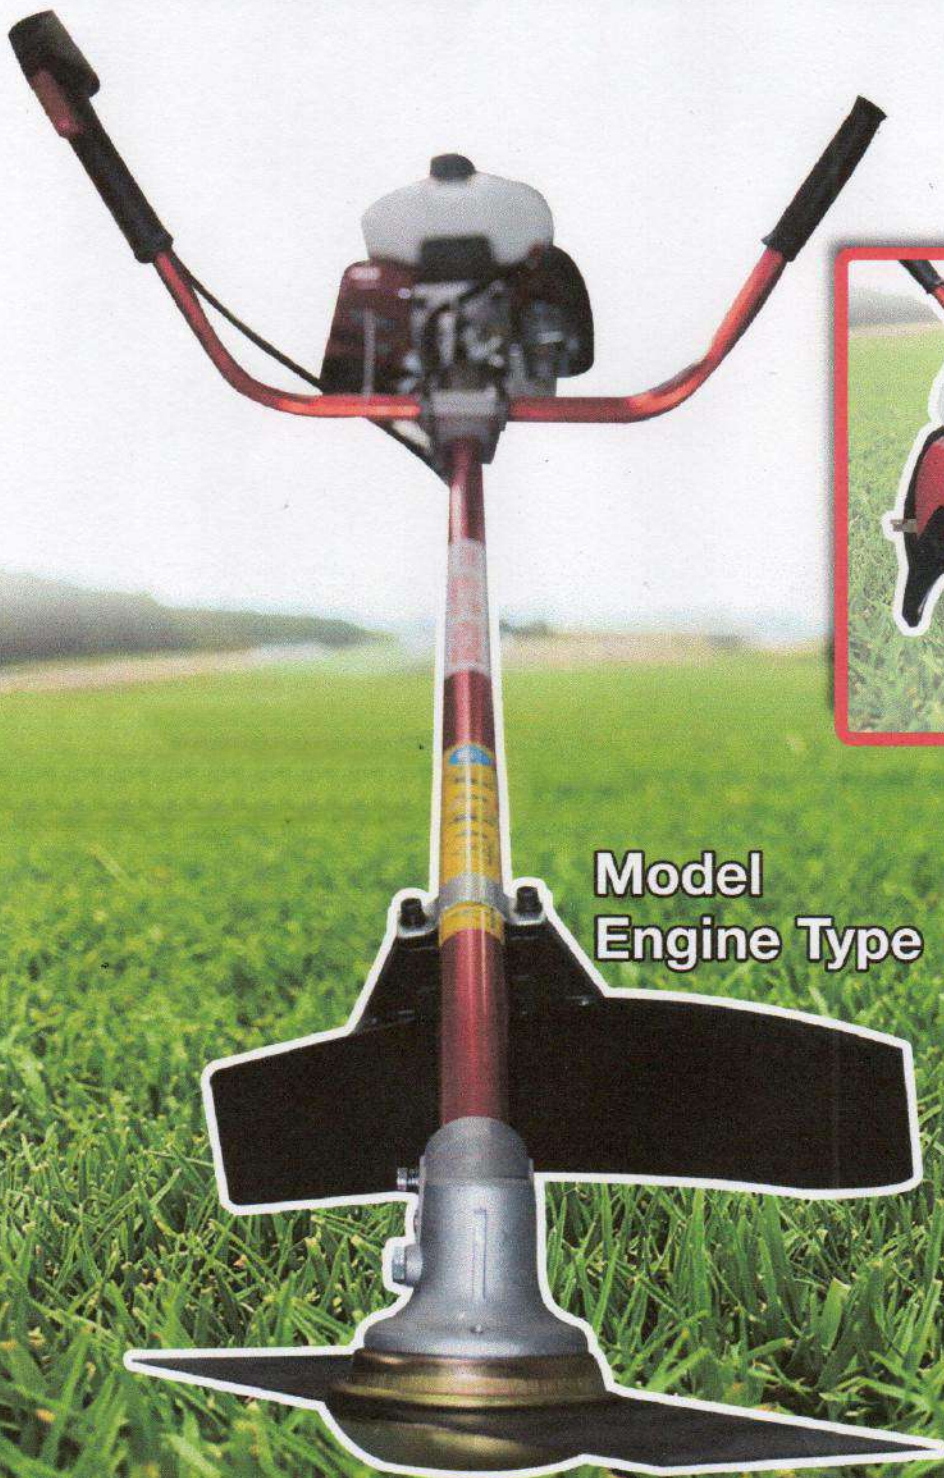

Model : CG411
Engine Type : Gasoline Engine
2 Stroke

POWER ARC

INDUSTRIAL HEAVY DUTY SERIES

INDUSTRIAL GAS CUTTING OUTFIT

The Power Arc industrial Gas Cutting Outfit has been designed for the professional who demands performance for general purpose oxygen-acetylene cutting and welding applications. As with all gas equipment produced by Power Arc, the items in this kit have been carefully designed and manufactured to provide the highest level of quality. All the equipment and accessories are packed in a sturdy stainless steel toolbox. This kit offers great value for the professional who requires the extra feature that Power Arc gas equipment offers.

✓ **COMET TYPE**
(STAINLESS CASE)

Contents

- ▶ Power Arc welding outfit
- ▶ Power Arc blowpipe cutting attachment
- ▶ Cutting nozzle 41 #6,8,12,15
- ▶ Welding nozzle #810,12,15,20
- ▶ Heating tip 8x12HT
- ▶ Oxygen regulator & Acetylene regulator
- ▶ Regulator flashback arrestor Oxy+Ace
- ▶ Torch flashback arrestor Oxy+Ace
- ▶ Tip cleaner, Spark, lighter, Spanner
- ▶ Twin hose T grade 7.5 meters w/fitings
- ▶ Goggles, Circle cutting attachments
- ▶ Manual

Features

- ▶ Suitable for light to medium duty cutting and welding
- ▶ Multi fuelled torch
- ▶ Comfortable grip handle
- ▶ Tough solid brass construction
- ▶ Excellent flame stability
- ▶ Flashed resistant mixer
- ▶ High flow oxygen cutting valve
- ▶ Cuts up to 150mm (6")
- ▶ Torch profile gives excellent job visibility
- ▶ Ideal for the professional, contractor & tradesman



The equipment supplied in this kit is designed for use with Oxygen & Acetylene gas only (refer to operating instructions)





Industrial Gas Welding & Cutting Outfit




- Perfect for an Amateur Metalworker or a Seasoned Professional
- Brass and steel cutting torch attachment
- Flint Striker Tool and Goggles With A No. 5 Shade - Twin Welding Hose, Tip Cleaning Tools
- Torch And Rosebud Heating Tip (Size No. 6) - 3 Welding Nozzles (Size No. 0, No. 2, No. 4)
- Comes with hoses, welding and cutting torches, goggles, tip cleaners and striker packed in a heavy duty molded storage case



LIGHT CONSTRUCTION MACHINERIES

DOUBLE WHEEL WALK BEHIND WITH DIESEL ENGINE

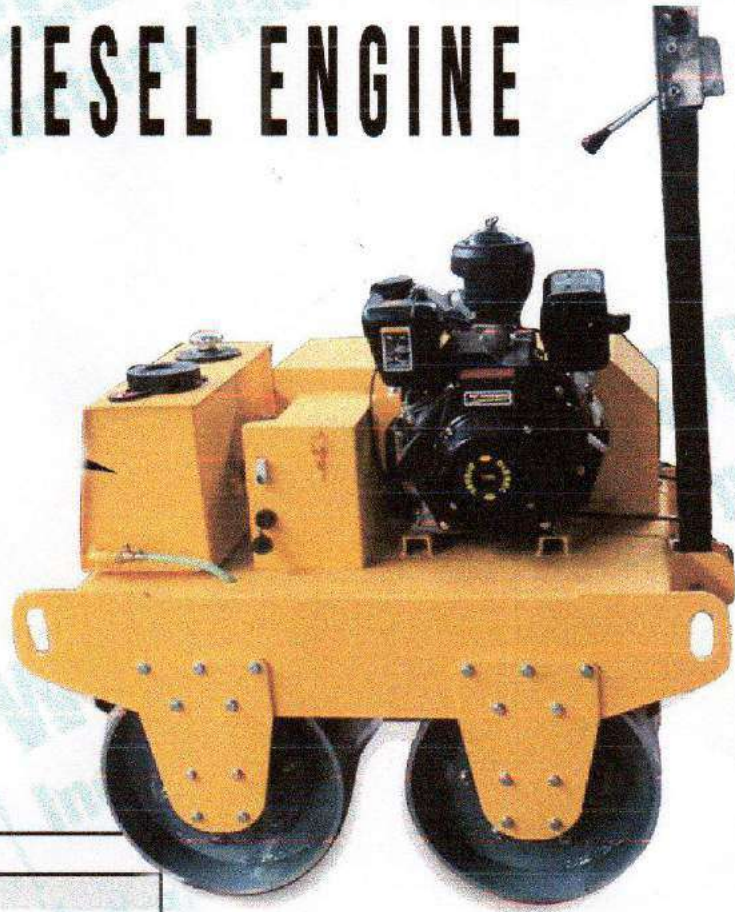

Double drum Vibratory Road Roller

Length x width x height	2450x750x1800mm
The width of drum	600mm
The Diameter of drum	450mm
Operation weight	530kg
Travel speed	0-4km/h
Drum type front	Smooth
Drum type rear	Smooth
Water tank capacity	30L
Engine type	CF186F
Power output	6.0hp / 3600rpm
Fuel tank capacity	3.5L
Packing size	1460x810x1230mm
Frequency vpm	75Hz
Centrifugal Force	20kn

ELECTRIC WELDING ROD DRYING OVEN

with constant Temperature

These are reliable ovens which works hour after hour, day after day the same. These are provided with thermostat control for precise setting of drying. Totally dry welding consumables yield radiographic quality welds. Our clients can avail these ovens from us at market leading prices.




SPECIFICATION

- SS Rods for Electrode Placement.
- Temperature range upto 350°C.
- Temperature control - Automatic Digital
- Input voltage : 220V

MODEL	AF-100
Electrode Capacity	100Kg
Electrode lengs	450mm
Input Voltage	220V
Power	2.8KW
Max. Temperature	50°C-350°C


ELECTRIC MOTOR

SINGLE PHASE DUAL CAPACITOR

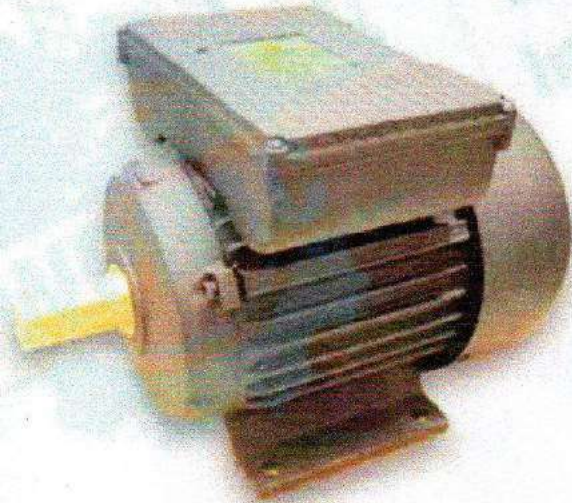

COPPER

1.5 HP	1.1 KW 220 V 10.5 A 60 HZ 1740 RPM
2 HP	1.5 KW 220 V 9.6 A 60 HZ 1750 RPM
3 HP	2.2 KW 220 V 13.8 A 60 HZ 1750 RPM
5.5 HP	4 KW 220 V 24.8 A 60 HZ 1750 RPM

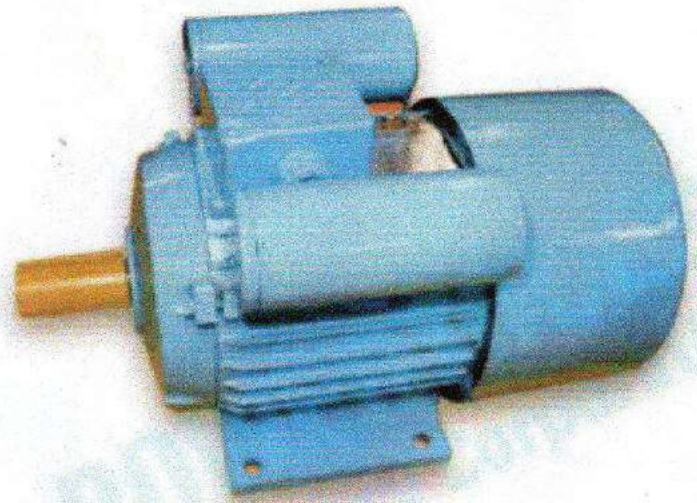

ALUMINUM

1.1 KW	
220 V	
7.02 A	
60 HZ	
1750 RPM	



ELECTRODE DRYER



Model:

TRC-5TC ELECTRODE DRYER

Electrode capacity	: 5kgs
Input voltage	: AC220V
Power	: 300W
Max temperature range	: 50°C - 300°C
Max electrode length	: 450mm
Chamber size	: Dia 86mm X 465mm(Height)
Overall size (L x W x H)	: 165 x 195 670mm
Weight	: 4.1kgs





GAS CUTTING MACHINE



SPECIFICATIONS

MODEL : IK-12 BEETLE
WEIGHT : 7.0 kg
ONE TORCH WITH BODY : 9.5 kg
TWO TORCH WITH BODY : 13 kg
MACHINE SIZE : 350mmx140x175mm
WHEEL DISTANCE : 160MM
POWER SOURC : +10%
REDUCTION GEAR : SINGLE CONE SYSTEM
CUTTING SPEED : 150-800mm/mm
CUTTING EDGE SHARP : 1.V (45°)
CUTTING THICKNES : 5.50mm (by standard accessories)
MOTOR : 1500 rpm

ACCESSORIES

CABTYRE CODE : 1 Set
TIP : ANM-6L 1/32", 3/64", 1/16"
WEIGHT : 1 Pc (two torch set only)
WEIGHT SUPPORTER : 1 Pc (two torch set only)
FITTING : 1 Pc (two torch set only)

OPTIONAL

RAIL : 1.8m, 2.5m, 3.0m
CIRCLE RAIL :
CIRCLE CUTTING ATTACHMENT :



GASOLINE GENERATORS

PAG1500

**COPPER WIRE
NO KEY START
220V, 60HZ
RATED POWER: 850W**



PAG2500

**COPPER WIRE
NO KEY START
220V, 60HZ
RATED POWER: 1.8KW**



PAG3500

**COPPER WIRE
NO KEY START
220V, 60HZ
RATED POWER: 2.8KW**



PAG5500E


**COPPER WIRE
NO KEY START
220V, 60HZ
RATED POWER: 4.2KW**



PAG6500E

**COPPER WIRE
NO KEY START
220V, 60HZ
RATED POWER: 5KW**



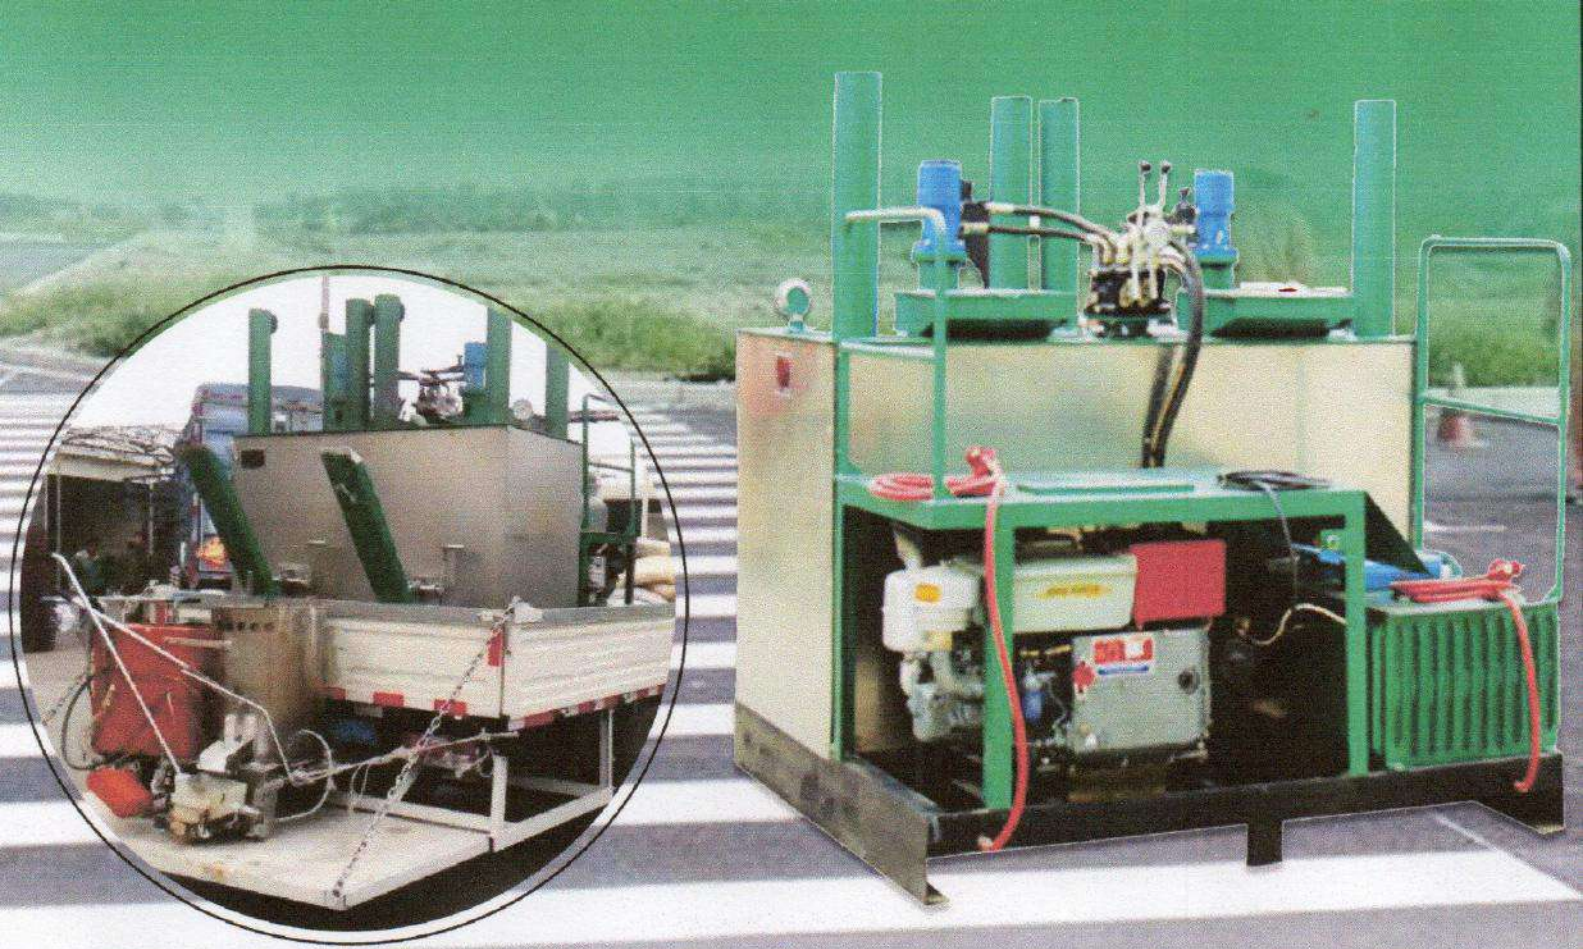

HYDRAULIC DOUBLE TANK THERMOPLASTIC PAINT PREHEATER

Engine	15HP diesel oil engine
Capacity of hydraulic tank	90L
Startup Mode	Electric start/Hand starting
Motor	BM Hydraulic Motor
Mixing	The positive and negative voation, stepless speed stirring
Hydraulic protection	Overload overflow protection
Capacity of paint bucket	600kgx2
Burner	Direct injection type burner
Fuel	LPG(liquefied petroleum gas)
Size	1550x1500x1750mm



Type	4-Stroke
Displacement(cc)	35.8
Engine	GX35
Engine Power(kw)	0.85
Max. Speed(rpm)	7,000
Carburetor Type	diaphragm
Fuel Tank Capacity(ml)	800
Engine Oil Capacity(ml)	800
Tube Diameter(mm)	28
Gross Weight	4.2kg

JB KAWASAKI

POWER SPRAYER

MULTIFUNCTIONAL MANUAL SPRAYER

- Robust Construction
- Comfortable shoulder Strap
- In-line filter to prevent nozzle clogging
- Heavy duty poly piston



MULTIFUNCTIONAL ELECTRIC SPRAYER



- Robust Construction
- Comfortable shoulder Strap
- In-line filter to prevent nozzle clogging
- Heavy duty poly piston



KAAZ CORPORATION

FLOAT BRUSH CUTTER



ORIGINAL

**TD40 ENGINE
(Kawasaki)**

SPECIFICATIONS

Drive System	: Auto centrifugal clutch, Spiral bevel gear
Reduction ratio	: 14:19
Rated blade speed(rpm)	: 5,200
Standard blades	: Metal blade : $\phi 225 \times 3T$, $\phi 255 \times 2T$
Size (LXWXH)(mm)	: 1,800 x 600 x 460
Applicable Engine	: TD40 (KAWASAKI)
Displacement (cm ³)	: 40.2
Max. output (kW)	: 1.21
Weight (kg)	: 8.5
Spark plug(mm)	: 0.6-0.7 <Gap of electrodes>
Fuel Tank capacity (litre)	: 1.0
Fuel mixture(Petrol(Gasoline): 2-stroke engine oil)	: 25:1

MADE IN JAPAN

POWER ARC

MIG - 250

MIG/TIG/MMA WELDING



IGBT Inverter Technology
Gas/Gasless MIG Welding
Arc, Welding, TIG-LIFT



MIG & MMA Accessories

2 POST PARKING LIFT

and other Garage Equipments
Available Here!

